




Professional A/C Unit With Flushing Function Superior Compressor & Vacuum Pump


BLPAC300A

FEATURES

- ✓ BLPAC300A uses a 7-inch touch screen to fully digitally display system pressure, temperature, recovery and charged amount.
- ✓ The sight glass and the dynamic cleaning interface allow the flushing process of the A/C system to be visualized and digitized.
- ✓ The newly designed program can fully automatically complete the necessary functions such as recovery, vacuum, charge, flush, and leak check of A/C system.
- ✓ The combination of hardware and software improves the equipment's ability to drain the waste oil, increasing the oil change rate to over 80%, allowing the car to run cool and quiet.



-  R-134a
-  ICE Vehicle
-  EV and HEV

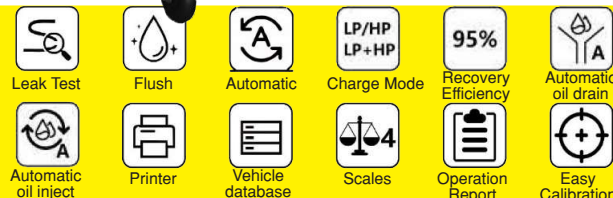

Model: BLPAC300A			
Display	Power Supply	Compressor	Vacuum pump
7" touch screen	220V/50Hz	2/3HP	120L/min
Recovery Efficiency	Charging Accuracy	Dry Filter Ability	Lifetime of Pump Oil
>95%	±10g	120kg	600 min
Service Hose	Cylinder Capacity	Oil Bottle Capacity	Machine Dimensions in mm (L*W*H)
3m	18kg	340ml	710*640*1160
Packing Dimensions in mm (L*W*H)		Net Weight	Gross Weight
765*705*1310		90kg	110kg




Professional A/C Unit With Flushing Function Superior Compressor & Vacuum Pump


BLPAC300YF

FEATURES

- ✓ BLPAC300YF uses a 7-inch touchscreen to fully digitally display system pressure, temperature, recovery and charged amount.
- ✓ The sight glass and the dynamic cleaning interface allow the flushing process of the A/C system to be visualized and digitized.
- ✓ The newly designed program can fully automatically complete the necessary functions such as recovery, vacuum, charge, flush, and leak check of A/C system.
- ✓ The combination of hardware and software improves the equipment's ability to drain the waste oil, increasing the oil change rate to over 80%, allowing the car to run cool and quiet.



-  HFO-1234yf
-  ICE Vehicle
-  EV and HEV

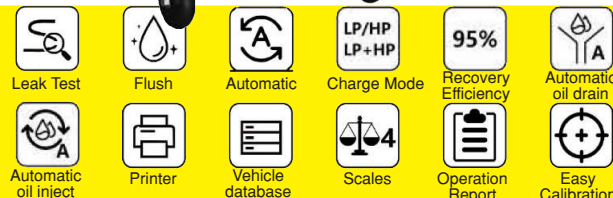

Model: BLPAC300YF			
Display	Power Supply	Compressor	Vacuum pump
7" touch screen	220V/50Hz	2/3HP	120L/min
Recovery Efficiency	Charging Accuracy	Dry Filter Ability	Lifetime of Pump Oil
>95%	±10g	120kg	600 min
Service Hose	Cylinder Capacity	Oil Bottle Capacity	Machine Dimensions in mm (L*W*H)
3m	18kg	340ml	710*640*1160
Packing Dimensions in mm (L*W*H)		Net Weight	Gross Weight
765*705*1310		92kg	112kg

Dual Gas A/C Service Station Superior Compressor & Vacuum Pump BLPAC300DU

FEATURES

- ✓ Fully automatic recovery, vacuuming, recharging and leak detection
- ✓ Internal system cleaning can avoid the mixing of different types of refrigerants and refrigerant oils
- ✓ 10" Fully digitalised display system for easy and intuitive menu navigation
- ✓ Equipped with 5 electronic scales for the measurement of R-134a Work Tank, HFO-1234yf Work Tank, PAG oil, POE oil and drained oil
- ✓ HP/LP/HP+LP charge mode is selectable
- ✓ Up to 20000 vehicle A/C service data base, addable and editable
- ✓ Use high-sensitivity sensors to realize the leak detection of A/C systems and equipment
- ✓ Intelligent prompts of filter and vacuum pump oil changing







Model: BLPAC300DU			
Display	Power Supply	Compressor	Vacuum pump
10" touch screen	220V/50Hz	2/3HP	120L/min
Recovery Efficiency	Charging Accuracy	Dry Filter Ability	Lifetime of Pump Oil
>95%	±10g	120kg	600 min
Service Hose	Cylinder Capacity	Oil Bottle Capacity	Machine Dimensions in mm (L*W*H)
3m	12kg	340ml	717*744*1048
Packing Dimensions in mm (L*W*H)		Net Weight	Gross Weight
770*820*1220		120kg	138kg


Dual Gas A/C Service Station With Flushing Superior compressor & vacuum pump **BLPAC300DUF**

FEATURES

- ✓ Fully automatic recovery, vacuuming, recharging and leak detection
- ✓ Internal system cleaning can avoid the mixing of different types of refrigerants and refrigerant oils
- ✓ 10" Fully digitalised display system for easy and intuitive menu navigation
- ✓ Equipped with 5 electronic scales for the measurement of R-134a Work Tank, HFO-1234yf Work Tank, PAG oil, POE oil and drained oil
- ✓ HP/LP/HP+LP charge mode is selectable
- ✓ Up to 20000 vehicle A/C service data base, addable and editable
- ✓ Use high-sensitivity sensors to realize the leak detection of A/C systems and equipment
- ✓ Intelligent prompts of filter and vacuum pump oil changing



 R-134a
 HFO-1234yf
 ICE Vehicle
 EV and HEV

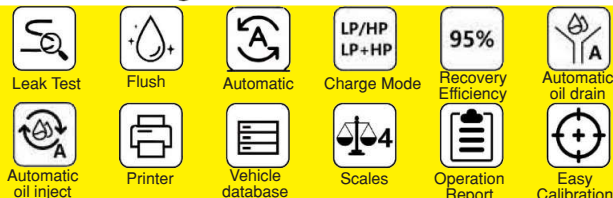

Model: BLPAC300DUF			
Display	Power Supply	Compressor	Vacuum pump
10" touch screen	220V/50Hz	2/3HP	120L/min
Recovery Efficiency	Charging Accuracy	Dry Filter Ability	Lifetime of Pump Oil
>95%	±10g	120kg	600 min
Service Hose	Cylinder Capacity	Oil Bottle Capacity	Machine Dimensions in mm (L*W*H)
3m	12kg	340ml	717*744*1048
Packing Dimensions in mm (L*W*H)		Net Weight	Gross Weight
770*820*1220		122kg	140kg